

NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with nation and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure LED luminaire has the correct polarity before installation.
- Based on maximum voltage restrictions for class 2 circuits in Canadian Electrical Code, the output cannot be accessible. This product has accessible output terminals. This product complies with this requirement since the installation instruction requires installation in Restricted Access Area.

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.


Burn:

- Allow luminaire to cool before handling luminaire.

Personal Injury:


- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.

Manufacturer is not responsible for any injuries due to the improper installation or handling of its products.

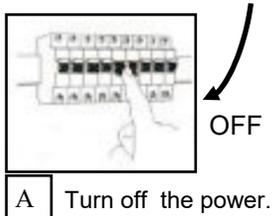


B 1) Drill 6mm (1/4") holes according to below drawing.


Model	Hole Center for Mounting Bracket
24	13 5/8" (346mm)
48	30 3/4" (781mm)
96	59 3/4" (1518mm)

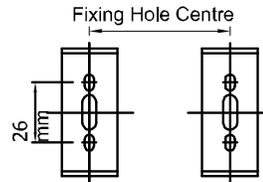

2) Insert 6mm (1/4") expansion pipe in the wall, fix the mounting bracket by M4 screw.

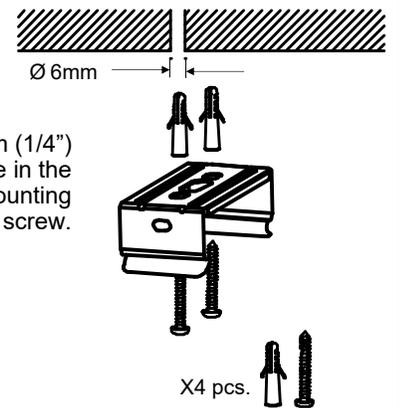


- C**
- 1) Firstly open the clips like picture A
 - 2) Secondly take off the diffuser like picture B
 - 3) Hold on the stainless fixture, take off the gear tray like picture C

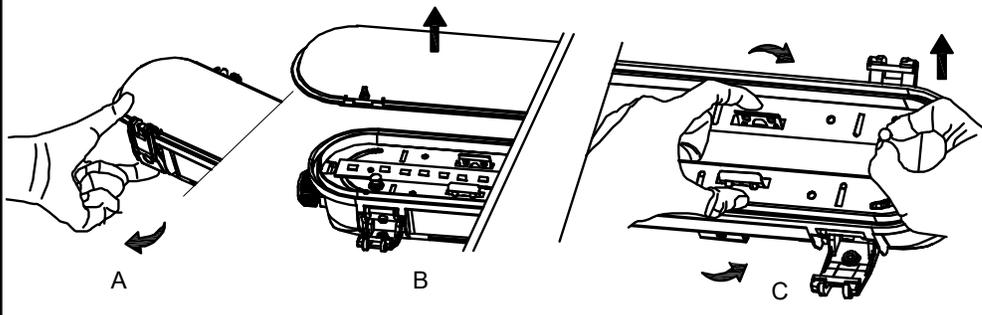


LSVB Series Installation Instructions

ERP: IIS00267
01/09/2023 Rev 2.0


- D** 1) Loosen the nut of the cable gland, put the cable through the cable gland.

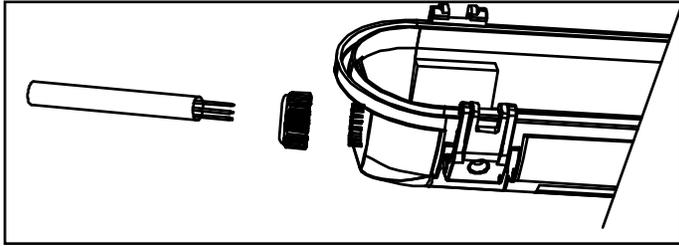


- 2) Connect the cable on the terminal block as shown below and tighten the cable gland.

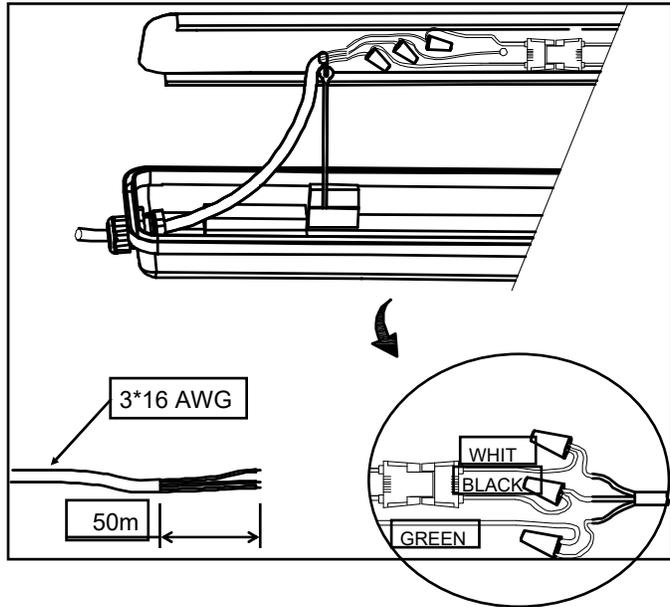


- E** 1) Tighten cable gland as shown below.
2) Fix gear tray with the housing.
3) Close the diffuser.

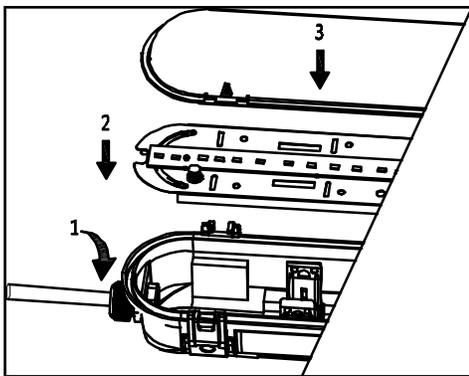

- F** 1) Install the fixture on the wall or ceiling.

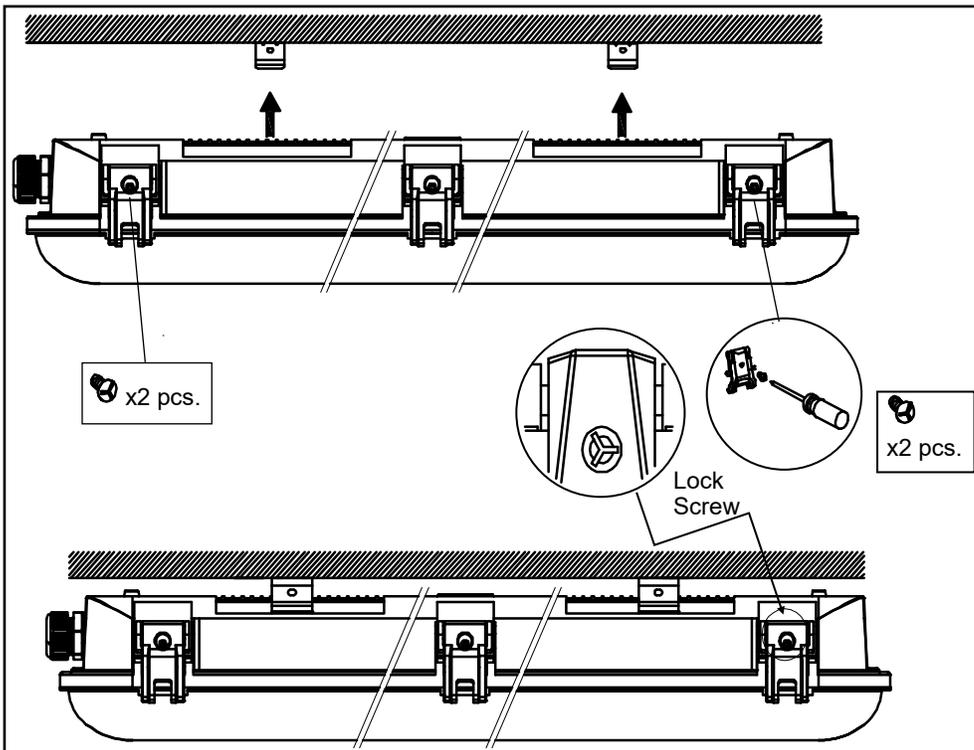

- G** Turn on the switch.

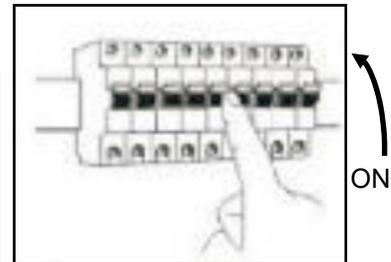

General Note:

For row-mounting applications, a second hole must be knocked out at the end of the housing. Appropriate conduit or similar (by others) will need to be attached to the ends with hardware (by others) and sealed or caulked to prevent water entry.